

FAN CLUB




Fan Club takes a pattern from antiquity and forges it from dazzling Jazz Glass, adding an artistic glass mosaic flair to a familiar motif. Stocked in solid Ice White, Blue Ombre with brushed brass, Cream Ombre with brushed brass, and White Ombre with Stainless Steel. The pattern in each colorway is truly special - tasteful, timeless, and thoroughly unique.



PICTURED: FAN CLUB BLUE OMBRE

FAN CLUB

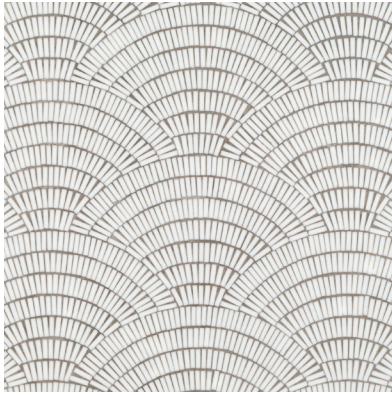

Ice White
Gloss




White Ombre with Stainless steel Metal Inlay
- Mixed Finish



Cream Ombre with Solid Brass Metal Inlay -
Mixed Finish



Blue Ombre with Solid Brass Metal Inlay -
Mixed Finish

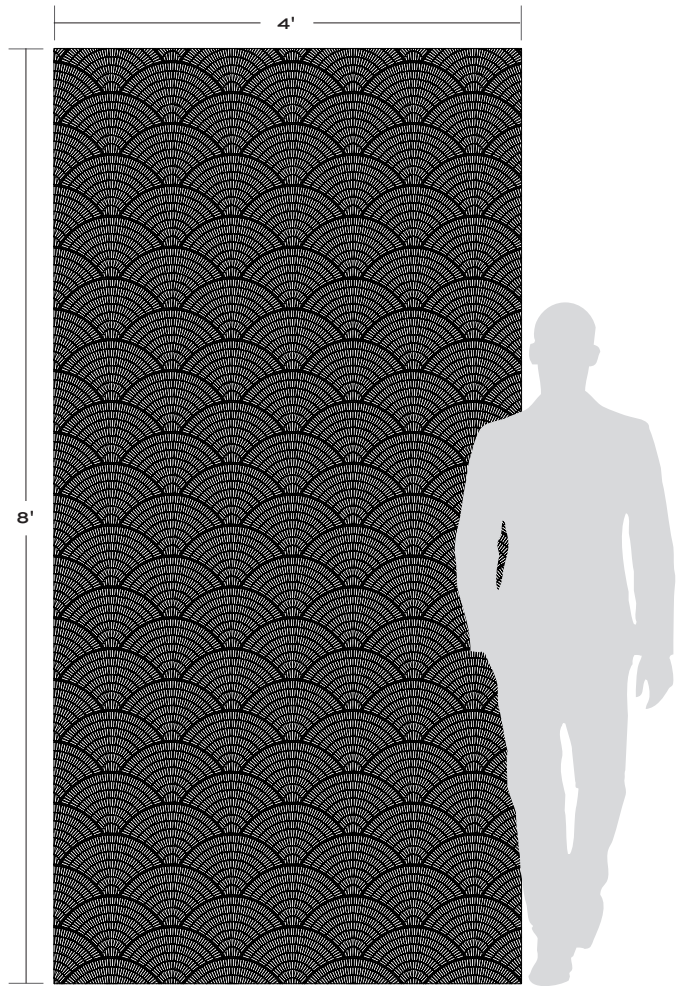

FAN CLUB OMBRE

APPLICATIONS							
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP
Light Traffic Residential	All	Yes, including steam	Yes ¹	No	Yes	Yes ¹	No

VARIATION			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Mapei Adesilex P10/Keraply White ²	Mapei Keracolor Sanded ³	As established on sheets	Mapei Mapelastic AquaDefense	Mapei Keracaulk Sanded	Not Required	AquaMix Concentrated Stone & Tile Cleaner	A.T. Guidelines	No	Required

MOSAIC	
FAN CLUB (0.26 sf/unit) Mesh mounted interlocking sheet 20 x 20 concept board	FAN CLUB OMBRE WITH BRASS/STAINLESS STEEL (0.27 sf/unit) Mesh mounted interlocking sheet 20 x 20 concept board

NOTES

¹ Ice White Gloss only

² Alternate mortar - Mapei Kerabond/Keralastic White or Mapei Granirapid White

³ Alternate grout - Mapei Ultracolor Plus

Tech Note: Grout joint between mosaic sheets should be the same as joints within the sheets. Particular attention should be paid to the joints between sheets - adjusting individual pieces if necessary to produce a 'seamless' installation. Final appearance of installation will be influenced by choice of grout color. Mockup to confirm grout color selection highly recommended.

Shine can be restored with using Flitz Paste Polished, apply a small dot of Flitz Paste Polished to the affected brass. Run a shop rag or microfiber cloth on the metal. Do not use a circular motion, avoid extended contact with grouted areas. Use a moist paper towel to wipe off any excess Flitz Paste Polished, do this quickly to avoid any finish changes in grout. Test a small area before applying to entire surface.