MATERA

Inspired by the enchanting city of Matera in Italy's Basilicata region, the Matera porcelain collection evokes the natural beauty of karstic limestone, including its distinctive grains and organic fractures. Available in Ash, Ivory, and Coal in 24" x 24" x 3/8" matte tile.

MATERA

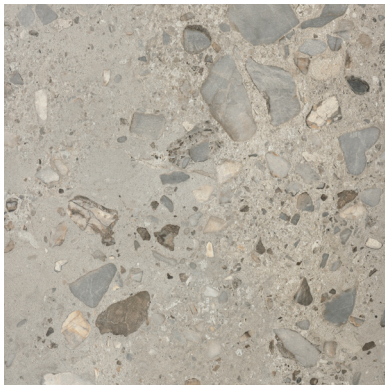

Ash Matte

Coal Matte

Ivory Matte

APPLICATIONS

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Commercial Light/Medium	All	Yes, including steam	Yes, including steam	Yes, non-freeze thaw	Yes, including freeze thaw	Yes	Yes	Yes

ATTRIBUTES

DCOF
0.61 0.66 0.62

VARIATION



TAILORED TO CUSTOMIZATION

- CARPET CUTTING
- FIELD
- FINISH
- MOSAIC
- SADDLE
- VANITY TOP
- WATERJET

INSTALLATION/MAINTENANCE

SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	FLEXIBLE SEALANT	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR LINK
Ardex X77 White Microtec Fiber Reinforced Mortar	Ardex FL Rapid Set Sanded	1/16" minimum	Ardex 8+9	SX Silicone Sealant	AquaMix Grout Release	AquaMix Concentrated Cleaner	TCNA Handbook	Max. 20% Offset	Recommended	

AVAILABLE SIZES



PORCELAIN RECTIFIED FIELD TILE
24" × 24" × 3/8"

NOTES

[1] Alternate Setting Materials: Ardex X5 White Medium Bed Mortar or Mapei Ultraflex LFT White
[2] Alternate Grout: Ardex DG 1 - One Component Grout or Mapei Ultracolor Plus FA

Tech Notes: Product MUST be installed in accordance with current TCNA Handbook tile methods. Dry laying of this product prior to installation is recommended. Porcelains that meet the DCOF standard may have more abrasive surface that might show dirt or debris. Remove with soap, water and firm scrubbing in order to clean. Consider this in the selection process. Per TCNA guidelines, running bond/brick joint patterns to be set with a max. offset of 20% and min. grout joint of 1/16", unless otherwise approved by owner. Grout release can be utilized, and bag grouting may be considered.